

BM195 & BM197 GENERAL SPECIFICATIONS

Display: 3-5/6 digits 6000 counts. & 3-1/2 digits 1,999 counts for Hz
Polarity: Automatic
Update Rate: 5 per second nominal;
Operating Temperature: 0°C to 40°C
Relative Humidity: Maximum relative humidity 80% for temperature up to 31°C decreasing linearly to 50% relative humidity at 40°C
Pollution degree: 2
Storage Temperature: -20°C to 60°C, < 80% R.H. (with battery removed)
Altitude: Operating below 2000m
Temperature Coefficient: nominal 0.15 x (specified accuracy) / °C @ (0°C - 18°C or 28°C - 40°C), or otherwise specified
Sensing: Average sensing for BM195; True RMS for BM197
Safety: Double insulation per IEC/EN61010-1 2nd Ed.,

Electrical Specifications

Accuracy is ±(% reading digits + number of digits) or otherwise specified, at 23°C ± 5°C & less than 75% relative humidity. True RMS model 197 voltage accuracies are specified from 5% to 100% of range or otherwise specified. Maximum Crest Factor < 1.4 : 1 at full scale & < 2.8 : 1 at half scale, and with frequency components within the specified frequency bandwidth for non-sinusoidal waveforms.

DC Voltage

RANGE	Accuracy
6.000V, 60.00V, 600.0V & 1000V	0.5%+5d

Input Impedance: 10MΩ, 50 pF nominal

AutoCheck™ DCV

RANGE	Accuracy
6.000V, 60.00V, 600.0V & 1000V	1.3% + 5d

AutoCheck™ Lo-Z DCV Threshold:

> +1.5VDC & < -1.5VDC nominal

AutoCheck™ Lo-Z DCV Input Impedance:

Initially approx. 2.5kΩ, 600pF nominal; Impedance increases abruptly within a fraction of a second as display voltage is above 50V (typical). Ended up impedances vs display voltages typically are:

10kΩ	@100V
60kΩ	@300V
200kΩ	@600V
420kΩ	@1000V

AC Voltage

RANGE	Accuracy
50Hz ~ 400Hz	
6.000V, 60.00V, 600.0V & 1000V	1.2% + 5d

Input Impedance: 10MΩ, 50 pF nominal

AutoCheck™ ACV

RANGE	Accuracy ¹⁾
50Hz ~ 60Hz	
6.000V, 60.00V, 600.0V & 1000V	1.5%+5d

AutoCheck™ Lo-Z ACV Threshold:

> 1.5V(50/60Hz) nominal

AutoCheck™ Lo-Z ACV Input Impedance:

Initially approx. 2.5kΩ, 600pF nominal; Impedance increases abruptly within a fraction of a second as display voltage is above 50V (typical). Ended up impedances vs display voltages typically are:

10kΩ	@100V
60kΩ	@300V
200kΩ	@600V
420kΩ	@1000V

AC+DC Voltage (BM197 Only)

RANGE	Accuracy
DC, 50Hz ~ 400Hz	
6.000V, 60.00V, 600.0V & 1000V	1.4% + 7d

Input Impedance: 10MΩ, 50 pF nominal

VFD ACV (with Low Pass Filter)

RANGE	Accuracy ¹⁾
10Hz ~ 20Hz	
6.000V, 60.00V, 600.0V & 1000V	3.5%+80d
20Hz ~ 200Hz	
6.000V, 60.00V, 600.0V & 1000V	2.0%+60d
200Hz - 400Hz ²⁾	
6.000V, 60.00V, 600.0V & 1000V	7%+80d

¹⁾Not specified for fundamental frequency > 400Hz

²⁾Accuracy linearly decreases from 2% + 50d @ 200Hz

UL61010-1 2nd Ed. & CAN/CSA C22.2 No. 61010.1-0.92 to CAT IV 1000V AC & DC
Transient Protection: 12kV (1.2/50μs surge)
Overload Protections:
 Clamp-on jaws: 2000A rms continuous
 " + " & COM Terminals (all other functions): 1000V rms
E.M.C.: Meets EN61326-1:2006 [EN55022, EN61000-3-2, EN61000-3-3, EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11]
 In an RF field of 3V/m:

Capacitance function is not specified

Other function ranges:

Total Accuracy = Specified Accuracy + 200 digits

Performance above 3V/m is not specified

Power Supply: 1.5V AA Size (IEC LR6) battery X 2

Power Consumption: Typical 14mA for Current functions, and 5.2mA for others

to 7% + 80d @ 400Hz

CREST-MAX Capture Mode

Accuracy: Specified accuracy plus 250 digits for changes > 5ms in duration

Ohm & AutoCheck™ Ohm¹⁾

RANGE	Accuracy
600.0Ω, 6.000KΩ, 60.00KΩ	0.5%+5d
600.0KΩ	0.8%+5d
6.000MΩ	1.2%+5d
40.00MΩ	2.3%+5d

Open Circuit Voltage: 0.45VDC typical

¹⁾AutoCheck™ Ohm Threshold:

< 10.00MΩ nominal

Audible Continuity Tester

Audible Threshold: Between 10Ω and 200Ω

Response time: 32ms approx.

Capacitance

RANGE	Accuracy ¹⁾
60.00nF, 600.0nF, 6.000μF	2.0%+5d
60.00μF, 600.0μF	3.5%+5d ²⁾
2000μF	4.0%+5d ²⁾

¹⁾Accuracies with film capacitor or better

²⁾Temperature Coefficient: 0.25 x (specified accuracy) / °C @ (0°C - 18°C or 28°C - 40°C)

Diode Tester

RANGE	Accuracy
1.000V	1.0% + 3d

Test Current: 0.56mA typically

Open Circuit Voltage: < 1.8VDC typically

DCA Current (Clamp on)

RANGE	Accuracy ^{1) 2)}
200.0A	2.0%+5d
0-500A	2.0%+5d
500-2000A	2.5%+5d

¹⁾Induced error from adjacent current-carrying conductor: < 0.1A/A

²⁾Specified with Relative Zero Δ mode applied to offset the non-zero residual readings, if any

ACA Current (Clamp on)

RANGE	Accuracy ¹⁾
50Hz ~ 400Hz	
200.0A	2.0%+5d
0-500A	2.5%+5d
500-2000A	3.0%+5d

True RMS Crest Factor (BM197 only):

< 1.4 : 1 at full scale & < 2.8 : 1 at half scale

¹⁾Induced error from adjacent current-carrying conductor:

< 0.1A/A

Low Battery: Below approx. 2.4V

APO Timing: Idle for 34 minutes

APO Consumption: 10μA typical

Dimension: L264mm X W97mm X H43mm

Weight: 608 gm

Jaw opening & Conductor diameter : 55mm max

Accessories: Test leads (pair), user's manual, Bkp60

banana plug K-type thermocouple x 1 (BM197 only)

Optional purchase accessories: USB interface kit

BRUA-19X; BKB32 banana plug to type-K socket plug

adaptor (BM197 only)

Special Features: AutoCheck™ V&Ω; VFD-V &

VFD-Hz; Backlighted LCD (BM197 only); 5ms

CREST-MAX Capture mode (Peak Hold); Auto-ranging

Relative-Zero mode; Display Hold; EF-Detection (NCV);

Optional Interface capabilities with PC computers

DC+ACA Current (Clamp on) (BM197 Only)

RANGE	Accuracy ^{1) 2)}
DC, 50Hz ~ 400Hz	
200.0A, 2000A	3.0%+8d

True RMS Crest Factor:

< 1.4 : 1 at full scale & < 2.8 : 1 at half scale

¹⁾Induced error from adjacent current-carrying conductor:

< 0.1A/A

²⁾Specified with Relative Zero Δ mode applied to offset the non-zero residual readings, if any

Temperature (BM197 only)

RANGE	Accuracy
-50 °C ~ 1000 °C	0.3% + 4d
-58 °F ~ 1832 °F	0.3% + 6d

K-type thermocouple range & accuracy not included

Hz Line Level Frequency

Function	Sensitivity (Sine RMS)	Range
6V	2V	40Hz ~ 1999Hz
60V	20V	40Hz ~ 1999Hz
600V	100V	40Hz ~ 1999Hz
1000V	600V	40Hz ~ 1999Hz
200A	10A	20Hz ~ 400Hz
2000A	40A	20Hz ~ 400Hz
VFD 6V ¹⁾	1V~2V	10Hz ~ 400Hz
VFD 60V ¹⁾	6~20V	10Hz ~ 400Hz
VFD 600V ¹⁾	60V~200V	10Hz ~ 400Hz

Accuracy: 0.1%+4d

¹⁾VFD sensitivity linearly decreases from 10% F.S. @

200Hz to 40% F.S. @ 400Hz

Non-Contact EF-Detection

Typical Voltage	Bar-Graph Indication
20V (tolerance: 10V ~ 36V)	-
55V (tolerance: 23V ~ 85V)	---
110V (tolerance: 59V ~ 600V)	-----

Indication: Bar-graph segments & audible beep tones

proportional to the field strength

Detection Frequency: 50/60Hz

Detection Antenna: Top side of the stationary jaw

Probe-Contact EF-Detection: For more precise indication

of live wires, such as distinguishing between live and

ground connections, use the Red (+) test probe for direct

contact measurement

LOCK

www.lockinc.com.tw

洛克儀器股份有限公司
Lock Instrument Co. Ltd

[台北] 新北市中和區中正路764號6樓

TEL: (02)3234-6000 FAX: (02)2223-1199

[新竹] 新竹市北區光華二街72巷79號

TEL: (03)532-4199 FAX: (03)534-1091

BRYMEN
BRIGHT PEOPLE'S CHOICE

For 55mm Large Conductor Size And Ultimate Safety For 2000A Areas!

VFD V/Hz, Ghost-Voltage-Buster, True-rms & PC-Comm Interface for Advanced Users!



CE

LOCK
www.lockinc.com.tw
洛克儀器

BRYMEN


BRIGHT PEOPLE'S CHOICE
http://www.brymen.com

BM190 SERIES
CAT IV 1kV Clamp-on DMMs



BM197

BM195

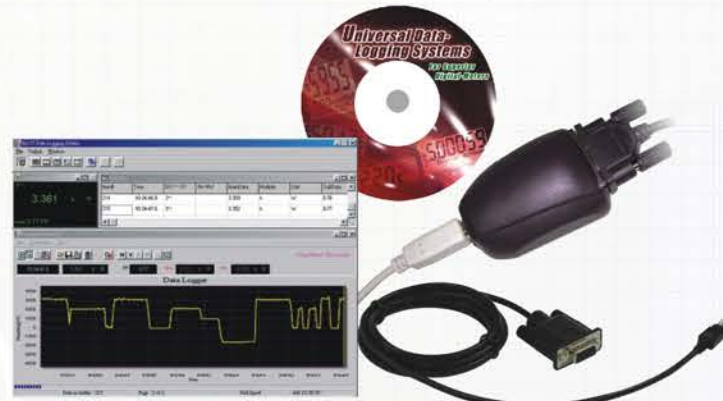

BRUA-19X PC Interface Kit
(Optional Purchase)

197	195	FUNCTIONS & FEATURES
●	●	VFD-V & Hz for fundamental V/Hz of most Variable-Frequency-Drives
●	●	Fully auto-ranging for ease of use; Fast measurement updates 5/sec
●	●	Large ACA/DCA Hall-effect jaws up to 55mm conductor size
●	●	3-5/6 digits, 6,000 counts + 1,999 counts dual display
●	●	2000A DC & AC Clamp-on + Multimeter ranges
●	●	1000VAC/DC input protection on all functions
●	●	Ultimate safety up to CAT IV 1000VAC/DC
●	●	Dual Display ACA+Hz and ACV+Hz
●	●	High 0.5% DCV accuracy
●	●	Soft carrying pouch
●	●	Auto Power Off
●	●	Data HOLD
●	●	Relative Zero mode
●	●	Non-Contact EF-Detection (NCV)
●	●	Fast 5ms Crest-MAX mode to capture in-rush currents
●	●	Probe-Contact EF-Detection for more precise indication of live
●	●	AutoCheck™ feature (Automatic DCV, ACV & Ohms selection)
●	●	Lo-Z volts to drain ghost voltages (AutoCheck™ feature)
●	●	AC, AC+DC True RMS voltage and current functions
●	●	Back-lighted easy-to-read LCD display
●	●	Type-K temperature -50°C to 1000 °C or -58°F to 1832°F selectable
●	●	DCV 4 ranges 6.000V to 1000V
●	●	ACV 4 ranges 6.000V to 1000V
●	●	DCA 2 ranges 200.0A to 2000A
●	●	ACA 2 ranges 200.0A to 2000A
●	●	Ohm 6 ranges 600.0Ω to 40.00MΩ
●	●	Diode test; Fast audible Continuity
●	●	Line-level ACV Frequency 10Hz to 1999Hz
●	●	Non-invasive ACA Frequency via clamp jaws 20Hz to 400Hz
●	●	Cx 6 ranges 60.00nF to 2000μF for start & run motor capacitors
●	●	Optional purchase USB cable set & software for Win98/2k/xp/Vista/Win7
●	●	Rugged fire retarded casing with battery access door
●	●	Transient protection 12kV 1.2/50μs lightning surge
●	●	LVD EN61010-2-032 & EN61010-1 CAT IV 1000V
●	●	EMC EN61326-1:2006 (EN55022, EN61000-3-2/-3 & EN61000-4-2/-3/-4/-5/-6/-8/-11)

CAT IV 1kv! 2000A DC+AC TRMS! Dual-Display VFD Convenience!

Start & Run Motor Cx, In-rush Crest, EF-Detection, °C/°F and Auto-Check™ Features!

FAST AUDIBLE CONTINUITY
FOR QUICK OPEN-SHORT TESTS ON SWITCHES, FUSES, AND WIRES

LARGE HALL-EFFECT CLAMP JAWS
FOR LARGE CONDUCTORS UP TO 55mm WITH DC & AC 2000A CAPABILITY

RUGGED & DURABLE
HIGH-IMPACT FIRE-RETARDED ENCLOSURE WITH BATTERY COMPARTMENT & ACCESS DOOR

DIODE TEST
FOR TESTING DIODES & RECTIFIERS

CAPACITANCE
6 AUTO-RANGES UP TO 2000μF TO MEASURE MOTOR CAPACITORS

TYPE-K TEMPERATURE (BM197 ONLY)
SELECTABLE °C AND °F READINGS; COMES WITH BKP60 BEAD PROBE

AUTO-POWER-OFF
EXTENDS BATTERY LIFE

DATA HOLD
FREEZES THE DISPLAYING READING FOR LATER VIEW

5ms CREST-MAX
CAPTURES IN-RUSH PEAK SIGNALS OF ACA OR ACV AS SHORT AS 5ms IN DURATION

HIGH CURRENT (ACA) Hz
MEASURES NON-INVASIVE ACA FREQUENCY VIA CLAMP JAWS

HIGH VOLTAGE (ACV) Hz
MEASURES NOISY HIGH VOLTAGE ACV FREQUENCY VIA TEST LEADS

0.5% DCV BASIC ACCURACY
DCV 4 AUTO-RANGES TO 1000V; ACV 4 AUTO-RANGES TO 1000V

EF-DETECTION
BOTH NON-CONTACT (NCV) & SINGLE-PROBE VOLTAGE DETECTION FOR IDENTIFYING LIVE LINES

RELATIVE ZERO MODE
FOR CONVENIENT READINGS COMPARISON & OFFSET

PC-COMM INTERFACE CAPABILITY
OPTIONAL PURCHASE RS232C+USB CABLES WITH DATA RECORDING PC SOFTWARE FOR WIN98/NT4/2K/XP/VISTA/WIN7

TRANSIENT PROTECTION
UP TO 12kV 1.2/50μs LIGHTNING SURGE; MORE CONFIDENCE FOR SERIOUS USERS

EMC
MEETS EN61326-1:2006 (EN55022, EN61000-3-2/-3 & EN61000-4-2/-3/-4/-5/-6/-8/-11)

BACKLIGHTED LCD DISPLAY (BM197 ONLY)
FOR EASY VIEWING IN THE DARK

GHOST-VOLTAGE-BUSTER
LoZ DRAINS GHOST/ STRAY VOLTAGES LEAVING ONLY HARD SIGNALS ON METER READINGS

FULLY AUTO-RANGING DMM
SHORTENS THE TIME TO MEASURE AND INCREASES THE EASE OF USE

AUTOCHECK™ FEATURE
AUTOMATIC SELECTION OF LoZ DCV, LoZ ACV & OHMS

VFD V & Hz FEATURE
MEASURES FUNDAMENTAL VOLTAGE & FREQUENCY OF MOST VARIABLE FREQUENCY DRIVES

ERGONOMIC & STREAMLINE BODY
ALSO COMES WITH A SOFT POUCH FOR EASY CARRYING & PROTECTION

AC+DC TRUE RMS MEASUREMENTS (BM197 ONLY)
FOR NON-SINUSOIDAL & COMPLEX WAVEFORMS OF VOLTAGES & CURRENTS

RESISTANCE
6 AUTO-RANGES UP TO 40MΩ

LVD CAT IV 1000V SAFETY
MEETS EN61010-2-032, EN61010-1 & UL STANDARDS ON CAT IV 1000V